


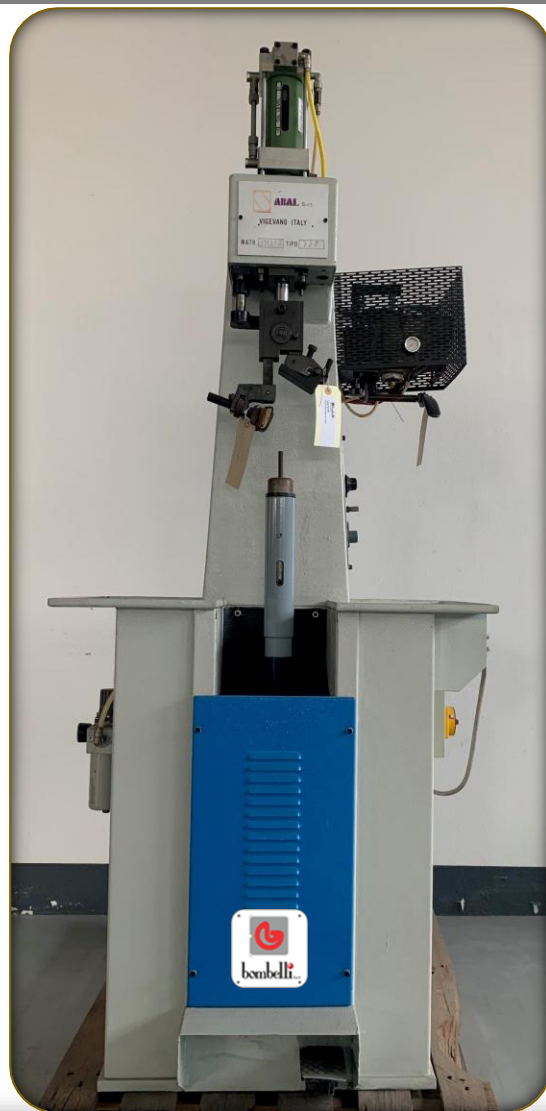

77F/CE

Fissatacchi semiautomatica con vite e termoplastico.

Semi-automatic heel attaching machine with screw and termoplastico.

Machine semiautomatique à cheviller les talons avec vis et thermoplastique.



Modelli 77/CE - 77F/CE - 80 A/CE - 80 FA/CE							
Caratteristiche tecniche - Technical specifications - Caracteristique techniques - Características técnicas							
Altezza / Height Hauteur / Altura	Larghezza / Width Largeur / Ancho	Profondità / Depth Profondeur / Profundidad	Peso netto / Net weight Poids net / Peso: neto	Alimentazione Voltage Alimentation Alimentación	Potenza assorbita Power consumption Puissance absorbée Consumo	Consumo aria Air consumption Consommation d'air Consumo aire	Produzione giornaliera Daily output Production journalière Producción por día
77-77F: cm. 210 80A-80FA: cm. 210	77-77F: cm. 80 80A-80FA: cm. 80	77-77F: cm. 80 80A-80FA: cm. 80	77F-80FA: kg. 210 77-80A: kg. 190	77F-80FA: V 380/50 hz 77-80A: V 220/50 hz	77F-80FA: Kw 1	77-77F-80A-80FA 0,01 mq ciclo/cycle (5-6 bar)	77-77F: 600 80A-80FA: 1.440 data bombelli.com